


(augustus 2019)

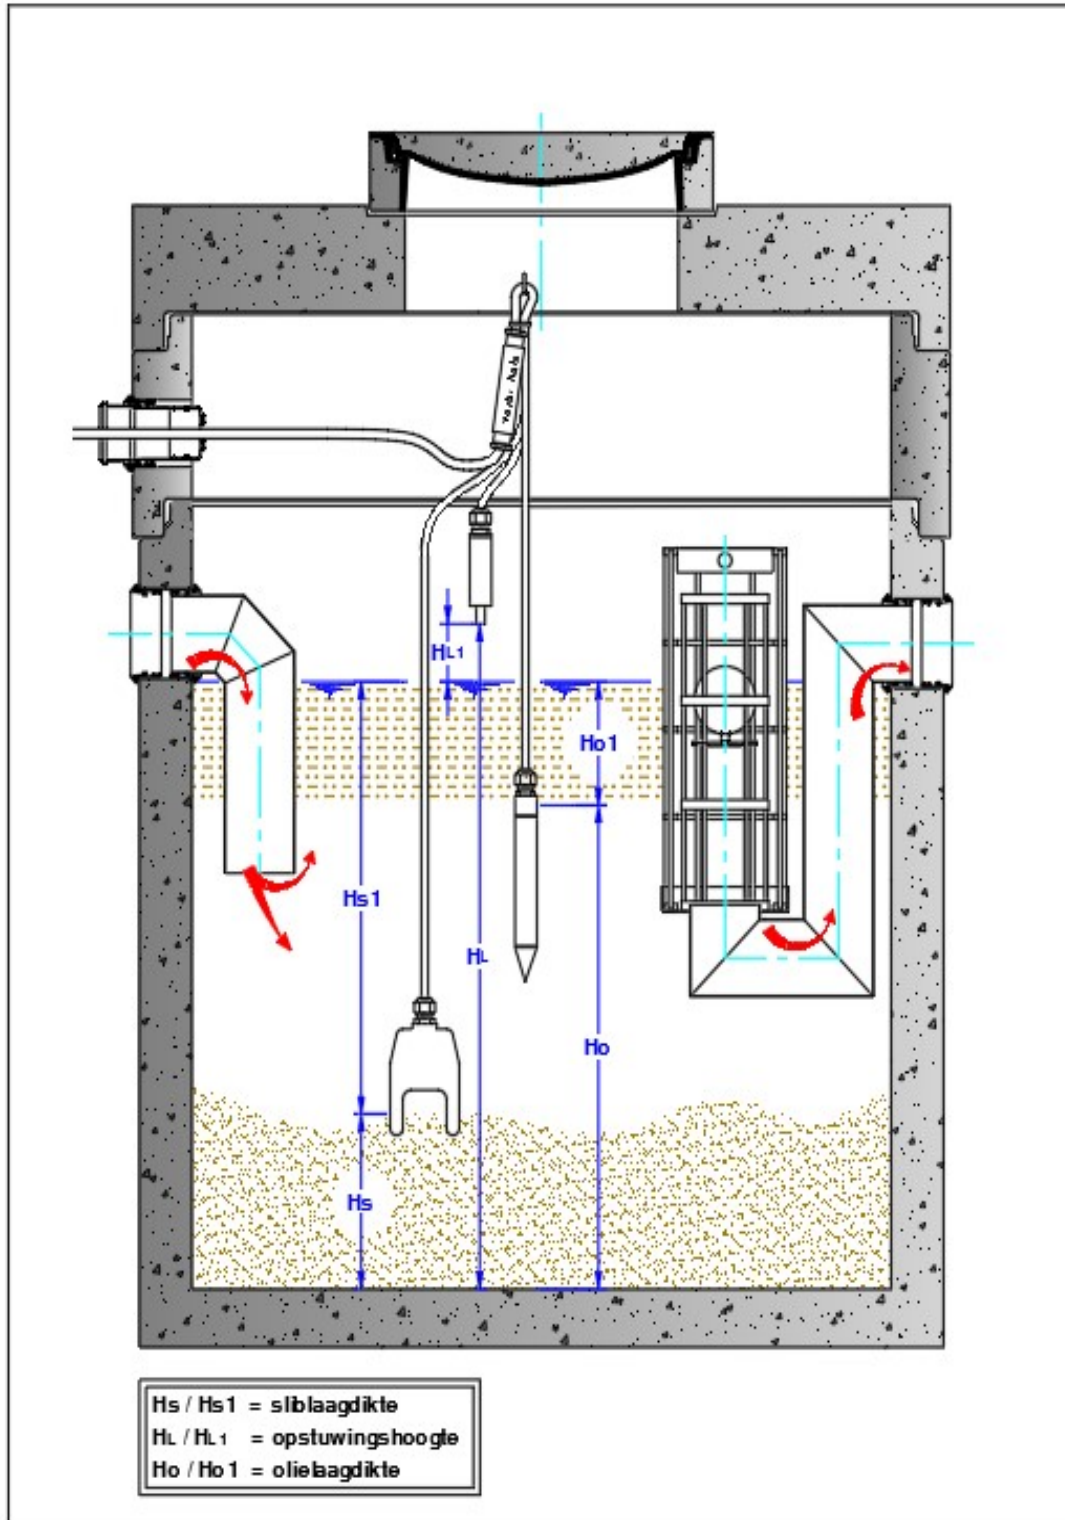

- 1) = Sliblaagdikte Sensor idOil-SLU / SET-S2
 2) = Opstuwing Sensor idOil-LIQ / SET-V
 3) = Olielaagdikte Sensor idOil-OIL / OMS-sensor / SET DM3 AL

Type	Sliblaagdikte (mm) 1)		Opstuwing (mm) 2)		Olielaagdikte (mm) 3)	
	Hs	Hs1	HL	HL1	Ho	Ho1
NEBOpre						
NS 3-1000	400	990			990	400
NS 3-1800 (E)	500	1050			1150	400
NS 15-1000	400	940			940	400
NS 15-1800 (E)	500	1000			1100	400
NEBOplus						
NS 3					555	145
NS 6					555	145
NS 10					475	225
NS 15 (E)					465	225
NS 20 (E)					765	225
NS 30 (E)					1270	280
NS 40 (E)					1270	340
NEBOsub						
NS 3- 300	150	710			660	200
NS 3- 650	290	870			840	320
NS 6- 600	270	890			960	200
NS 6-1200	540	1120			1340	320
NS 10-1000	290	770			740	320
NS 10-2500	710	1200			1640	270
NS 10-5000 (E)	800	1320			1895	225
NS 15-1500 (E)	240	1080			1095	225
NS 15-3000 (E)	480	1440			1545	225
NS 20-2000 (E)	210	1260			1245	225
NS 20-5000 (E)	510	1360			1645	225
NS 30-3000 (E)	300	1120			1195	225
NS 30-6000 (E)	610	1410			1795	225
NS 40-4000 (E)	410	1970			2155	225
NEBOstar						
NS 3			915	235	410	270
NS 6			915	235	410	270
NS 10			990	310	410	270
NS 15			1335	355	660	320
NS 20 (E)			1335	355	650	320
NS 30 (E)			1430	410	700	320
NS 40 (E)			2350	410	1620	320
NS 50			1490	385	785	320
NS 65			1490	385	785	320
NS 80			2030	515	1155	360
NS 100			2030	515	1155	360

(augustus 2019)

Type	Sliblaagdikte (mm) 1)		Opstuwing (mm) 2)		Olielaagdikte (mm) 3)	
	Hs	Hs1	HL	HL1	Ho	Ho1
NEBOcom						
NS 3- 300	150	610	865	105	560	200
NS 3- 650	290	770	1235	105	860	200
NS 6- 600	200	610	930	120	610	200
NS 6-1200	355	805	1280	120	870	290
NS 10-1000	285	775	1180	120	770	290
NS 10-2500	710	1200	2030	120	1720	290
NS 10-5000 (E)	820	1300	2390	270	1850	270
NS 15-1500 (E)	250	720	1280	310	650	320
NS 15-3000 (E)	490	980	1780	310	1150	320
NS 20-2000 (E)	330	790	1460	340	800	320
NS 20-5000 (E)	790	1280	2410	340	1750	320

Type	Sliblaagdikte (mm) 1)		Opstuwing (mm) 2)		Olielaagdikte (mm) 3)	
	Hs	Hs1	HL	HL1	Ho	Ho1
NEBOpro						
NS 3- 650	285	1075	1580	220	1040	320
NS 4- 800	360	1150	1730	220	1190	320
NS 6- 650	183	677	1105	245	540	320
NS 6-1200	333	827	1405	245	840	320
NS 6-2500	708	1202	2155	245	1590	320
NS 10-1000	283	977	1505	245	940	320
NS 10-2000	558	1252	2080	270	1540	270
NS 10-5000 (E)	795	1325	2390	270	1850	270
NS 15-1500 (E)	238	882	1450	330	800	320
NS 15-3000 (E)	488	1132	1950	330	1300	320
NS 20-2000 (E)	210	910	1460	340	800	320
NS 20-5000 (E)	510	1210	2060	340	1400	320
NS 30-3000 (E)	310	1110	1790	370	1100	320
NS 30-6000 (E)	610	1410	2390	370	1700	320

Type	Sliblaagdikte (mm) 1)		Opstuwing (mm) 2)		Olielaagdikte (mm) 3)	
	Hs	Hs1	HL	HL1	Ho	Ho1
NEBOmax						
NS 3- 650	290	870	1380	220	840	320
NS 10-2500	400	920	1590	270	1095	225
NS 10-5000 (E)	800	1320	2390	270	1895	225
NS 15-3000 (E)	480	1290	2090	320	1545	225
NS 20-5000 (E)	510	1360	2190	320	1645	225
NS 30-6000 (E)	610	1410	2285	265	1795	225